


Eingabe comvisMC BuildSec

Kunde:

Ort:

Datum:

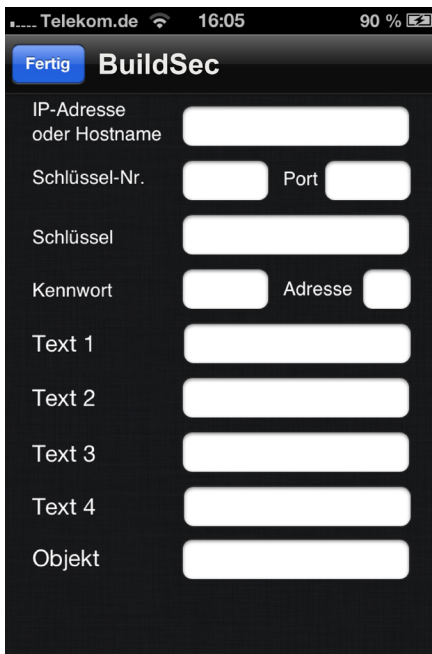

The screenshot shows a mobile application interface for 'BuildSec'. At the top, there is a status bar with 'Telekom.de', signal strength, Wi-Fi, time '16:05', and battery '90%'. Below the status bar is a blue button labeled 'Fertig' and the title 'BuildSec'. The main interface consists of several input fields: 'IP-Adresse oder Hostname' (a single wide field), 'Schlüssel-Nr.' (a field) and 'Port' (a smaller field), 'Schlüssel' (a single wide field), 'Kennwort' (a field) and 'Adresse' (a smaller field), 'Text 1', 'Text 2', 'Text 3', 'Text 4', and 'Objekt' (each a single wide field).

IP-Adresse oder Hostname:

Schlüssel-Nr.:

Port:

Schlüssel:

Kennwort:

Adresse:

Text 1:

Text 2:

Text 3:

Text 4:

Objekt: